



ILEE® LDA

CHARACTERISTICS

- Solid built for industrial use
- Compact housing
- Beam shape: dot or line
- Focusable
- AR coated glass lens
- Low power consumption

APPLICATIONS

- Measurement
- Pointing
- Alignment
- Positioning


TECHNICAL DATA

Wave-length ¹⁾ nm	Optical output mW	Beam shape	Laser class ²⁾	Divergence ³⁾ mrad	Wavelength shift ⁴⁾ nm/°C	Output power stability ⁴⁾ % 25°C	Ripple noise 4–6VDC rms	Order number
• 635	<1	Dot	2	<0.5	0.25	<0.5	<1%	0030-01-92-01
• 635	<1	Line ⁵⁾	2M	–	0.25	<0.5	<1%	0030-30-92-01
• 635	~3.5	Dot	3R	<0.5	0.25	<0.5	<1%	0030-03-92-01
• 635	~3.5	Line ⁵⁾	3R	–	0.25	<0.5	<1%	0030-31-92-01

¹⁾ other wavelengths on request ²⁾ EN/ISO 60825-1 ³⁾ E@FWHM ⁴⁾ after warmup ⁵⁾ ~100mm line length @ 100mm distance



DIMENSIONS (MM)

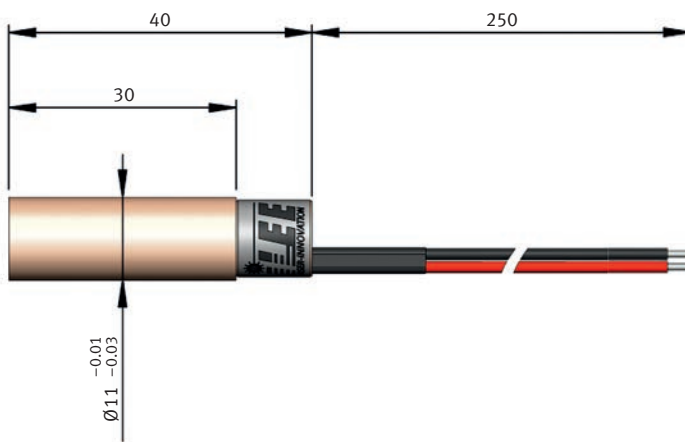

ELECTRICAL CONNECTIONS

VCC: Red (+) Operating voltage: 4–6VDC (8–32VDC available on request)
GND: Black (-)

Attention: Polarity on housing: –



Laser beams can cause damage to your eyes.
The user is responsible to observe the local safety regulations.

Mistakes and technical changes reserved.

Rheinmetall Air Defence AG

Birchstrasse 155 · 8050 Zurich · Switzerland · Phone +41 44 316 22 11
ilee.rad@rheinmetall.com · www.ilee.ch

